





# Introducing the Push-Lock™ Lag



The stainless steel Push-Lock™ Lag is for flat, straight runs where the back side of the wood end post is not accessible, so the cable must terminate in a fitting on the inside of the post.

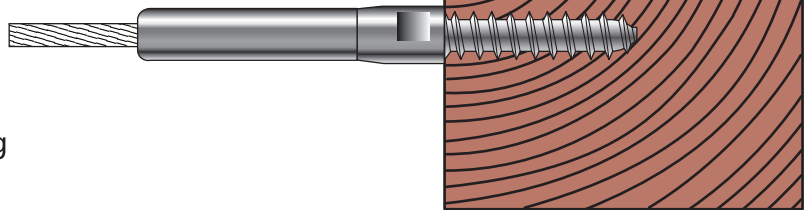


The Push-Lock Lag is actually two components that fit together: the lag and the Push-Lock coupler. The lag is slotted for an Allen wrench on one end to make it easy to screw into the post. Once installed, thread the Push-Lock coupler onto the lag and you're ready to attach the cable. The Push-Lock Lag is not a tensioning device, so the other end of the cable run will require a tensioner.

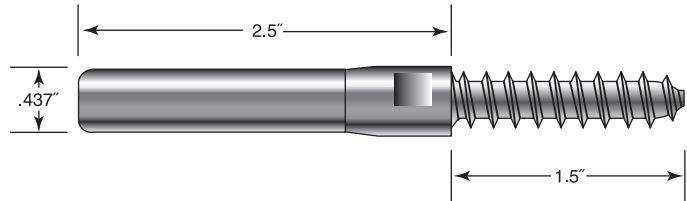

Order part number PL-L4. For use with 1x19 LH strand only.



**Ultra-tec®**  
CABLE RAILING SYSTEMS



ISO 9001: 2008 Certified / U.S.A. Manufacturer

**1-800-851-2961 ■ 775-885-1443 ■ Fax 775-885-2734**  
The Cable Connection ■ 52 Heppner Drive ■ Carson City, NV 89706  
E-mail: [earl@ultra-tec.com](mailto:earl@ultra-tec.com) Website: [www.ultra-tec.com](http://www.ultra-tec.com)