


# 259 Studs

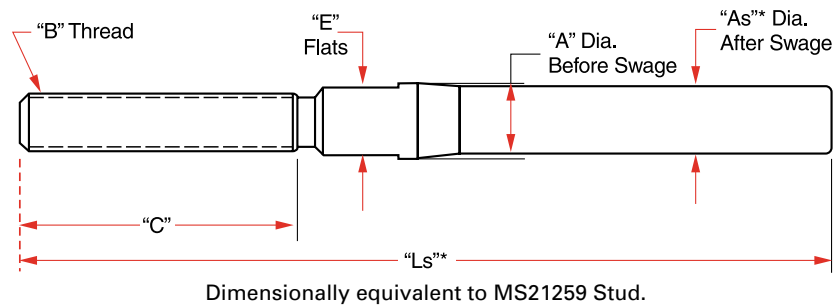

Part Number / Material				Cable Size	*Indicates After-Swage Dimensions (inches)					
Stainless Steel		Plated Steel			"A" Before Swage	"A" After Swage	"B"	"E"	"Ls"*	"C"
RH Thread	LH Thread	RH Thread	LH Thread							
259-2RH	259-2LH	259F2RH	259F2LH	1/16	.160	.138	#6-40 UNF	.156	2.65	1.045
259-3RH	259-3LH	259F3RH	259F3LH	3/32	.218	.190	#10-32 UNF	.187	3.00	1.204
259-4RH	259-4LH	259F4RH	259F4LH	1/8	.250	.219	1/4-28 UNF	.250	3.59	1.376
259-5RH	259-5LH	259F5RH	259F5LH	5/32	.297	.250	1/4-28 UNF	.250	3.97	1.376
259-6RH	259-6LH	259F6RH	259F6LH	3/16	.359	.313	5/16-24 UNF	.312	4.17	1.453
259-7RH	259-7LH	259F7RH	259F7LH	7/32	.427	.375	3/8-24 UNF	.375	4.81	1.625
259-8RH	259-8LH	259F8RH	259F8LH	1/4	.494	.438	3/8-24 UNF	.438	5.24	1.750
259-9RH	259-9LH	259F9RH	259F9LH	9/32	.563	.500	7/16-20 UNF	.563	5.75	1.875
259-10RH	259-10LH	259F10RH	259F10LH	5/16	.635	.563	1/2-20 UNF	.625	6.27	2.000
259-12RH	259-12LH	259F12RH	259F12LH	3/8	.703	.625	9/16-18 UNF	.688	7.06	2.250
259-14RH	259-14LH	259F14RH	259F14LH	7/16	.787	.688	5/8-18 UNF	.750	7.91	2.500
259-16RH	259-16LH	259F16RH	259F16LH	1/2	.844	.750	5/8-18 UNF	.812	8.75	2.500

Unless otherwise noted, the fittings shown are designed to hold at least the minimum cable breaking strength for 7x7 and 7x19 constructions. For fittings swaged onto cables of other constructions, please consult our sales and customer service department.