


Threaded Studs: Hex Swaged

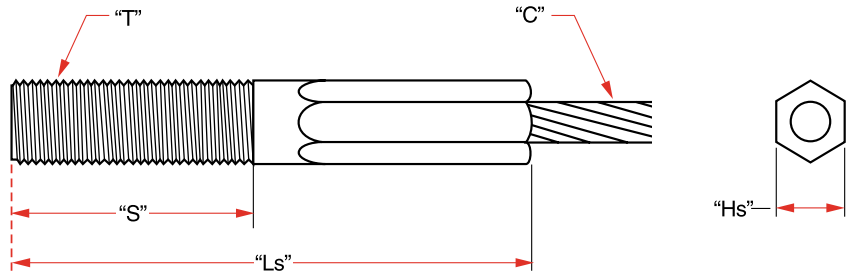


Part Number / Material			"C" Cable Size	Dimensions (inches)			
Brass	Stainless Steel	Carbon Steel Plated		"T" Thread Size	"S" Thread Length	After Swage	
						"Hs"	"Ls" *
HS1-12CSB	HS1-12CSC	--	1/32	5-40	.375	.093	.70
HS1-12CLB	HS1-12CLC	--	1/32	5-40	.75	.093	1.06
HS1-13CSB	HS1-13CSC	--	1/32	6-32	.44	.125	.75
HS1-13CLB	HS1-13CLC	--	1/32	6-32	.87	.125	1.18
HS1.5-13CSB	HS1.5-13CSC	--	3/64	6-32	.44	.125	.87
HS1.5-13CLB	HS1.5-13CLC	--	3/64	6-32	.87	.125	1.31
HS1.5-16CSB	HS1.5-16CSC	--	3/64	8-32	.50	.141	.93
HS1.5-16CLB	HS1.5-16CLC	--	3/64	8-32	1.00	.141	1.44
HS2-16CSB	HS2-16CSC	--	1/16	8-32	.50	.141	1.06
HS2-16CLB	HS2-16CLC	--	1/16	8-32	1.00	.141	1.56
HS1.5-19CSB	HS1.5-19CSC	HS1.5-19CSF	3/64	10-24	.56	.156	1.00
HS1.5-19CLB	HS1.5-19CLC	HS1.5-19CLF	3/64	10-24	1.12	.156	1.56
HS1.5-19FSB	HS1.5-19FSC	HS1.5-19FSF	3/64	10-32	.56	.156	1.00
HS1.5-19FLB	HS1.5-19FLC	HS1.5-19FLF	3/64	10-32	1.12	.156	1.56
HS2-19CSB	HS2-19CSC	HS2-19CSF	1/16	10-24	.56	.156	1.12
HS2-19CLB	HS2-19CLC	HS2-19CLF	1/16	10-24	1.12	.156	1.70
HS2-19FSB	HS2-19FSC	HS2-19FSF	1/16	10-32	.56	.156	1.12
HS2-19FLB	HS2-19FLC	HS2-19FLF	1/16	10-32	1.12	.156	1.70

*Other thread lengths and/or diameters are available on request. Contact our sales and customer service department.

The "Ls" dimensions listed are for 7x7, 7x19, or wire rope with a steel core. To ascertain the proper "Ls" dimension for 1x19 strand, add 2X (two times) the "C" cable size to the listed "Ls" dimension. For fiber core wire rope, consult our sales and customer service department.

Unless otherwise noted, the fittings shown are designed to hold at least the minimum cable breaking strength for 7x7 and 7x19 constructions. For fittings swaged onto cables of other constructions, please consult our sales and customer service department.

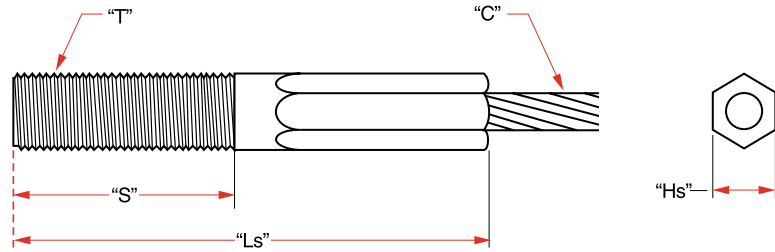

Part Number / Material			"C" Cable Size	Dimensions (inches)			
Brass	Stainless Steel	Carbon Steel Plated		"T" Thread Size	"S" Thread Length	After Swage	
						"Hs"	"Ls"*
HS3-25CSB	HS3-25CSC	HS3-25CSF	3/32	1/4-20	.75	.219	1.62
HS3-25CLB	HS3-25CLC	HS3-25CLF	3/32	1/4-20	1.50	.219	2.37
HS3-25FSB	HS3-25FSC	HS3-25FSF	3/32	1/4-28	.75	.219	1.62
HS3-25FLB	HS3-25FLC	HS3-25FLF	3/32	1/4-28	1.50	.219	2.37
HS4-25CSB	HS4-25CSC	HS4-25CSF	1/8	1/4-20	.75	.219	1.87
HS4-25CLB	HS4-25CLC	HS4-25CLF	1/8	1/4-20	1.50	.219	2.62
HS4-25FSB	HS4-25FSC	HS4-25FSF	1/8	1/4-28	.75	.219	1.87
HS4-25FLB	HS4-25FLC	HS4-25FLF	1/8	1/4-28	1.50	.219	2.62
--	HS5-31CSC	HS5-31CSF	5/32	5/16-18	1.00	.250	2.37
--	HS5-31CLC	HS5-31CLF	5/32	5/16-18	1.87	.250	3.25
--	HS5-31FSC	HS5-31FSF	5/32	5/16-24	1.00	.250	2.37
--	HS5-31FLC	HS5-31FLF	5/32	5/16-24	1.87	.250	3.25
--	HS6-37CSC	HS6-37CSF	3/16	3/8-16	1.12	.312	2.75
--	HS6-37CLC	HS6-37CLF	3/16	3/8-16	2.25	.312	3.87
--	HS6-37FSC	HS6-37FSF	3/16	3/8-24	1.12	.312	2.75
--	HS6-37FLC	HS6-37FLF	3/16	3/8-24	2.25	.312	3.87
--	HS7-43CSC	HS7-43CSF	7/32	7/16-14	1.37	.375	3.31
--	HS7-43CLC	HS7-43CLF	7/32	7/16-14	2.62	.375	4.56
--	HS7-43FSC	HS7-43FSF	7/32	7/16-20	1.37	.375	3.31
--	HS7-43FLC	HS7-43FLF	7/32	7/16-20	2.62	.375	4.56
--	HS8-50CSC	HS8-50CSF	1/4	1/2-13	1.50	.437	3.68
--	HS8-50CLC	HS8-50CLF	1/4	1/2-13	3.00	.437	5.18
--	HS8-50FSC	HS8-50FSF	1/4	1/2-20	1.50	.437	3.68
--	HS8-50FLC	HS8-50FLF	1/4	1/2-20	3.00	.437	5.18

*Other thread lengths and/or diameters are available on request. Contact our sales and customer service department.

The "Ls" dimensions listed are for 7x7, 7x19, or wire rope with a steel core. To ascertain the proper "Ls" dimension for 1x19 strand, add 2X (two times) the "C" cable size to the listed "Ls" dimension. For fiber core wire rope, consult our sales and customer service department.

Unless otherwise noted, the fittings shown are designed to hold at least the minimum cable breaking strength for 7x7 and 7x19 constructions. For fittings swaged onto cables of other constructions, please consult our sales and customer service department.

Note: The dotted line on the fitting illustrations denotes the measuring point for that terminal when used on a cable assembly.